

Kelvin Clamp



Made in Austria



xe-kk-4s-4s-rt



xe-kk-4s-4s-sw



xe-kk-4s-4s-bl

Technical specifications:

1x Socket: **4mm (Multi Contact)**

Current contin.: 32 A

Rated voltage: 1000 V

Clamp:

Contact pressure: 45N – 120N



xe-kk-4u-4u-rt



xe-kk-4u-4u-sw



xe-kk-4u-4u-bl

Technical specifications:

2x Socket: **4mm (Multi Contact)**

Current contin.: 32 A

Rated voltage: 1000 V

Clamp:

Contact pressure: 45N – 120N



xe-kk-4u-6u-rt



xe-kk-4u-6u-sw

Technical specifications:

1x Socket: 4mm (Multi Contact)

Current contin.: 32 A
Rated voltage: 1000 V

1x Socket: 6mm (Multi Contact)

Current contin.: 100 A (cable 16mm²)
Rated voltage: 600V

Clamp



Contact pressure: 45N – 120N

Xeron 6mm Round connector: (Available Q3/2023)


XE-KST6VR-16-SW (cabel 16mm²)
article number: 23.001-21 (black)

XE-KST6VR-16-RT (cabel 16mm²)
article number: 23.001-22 (red)

Clamping area 1

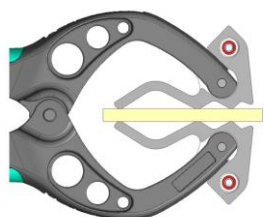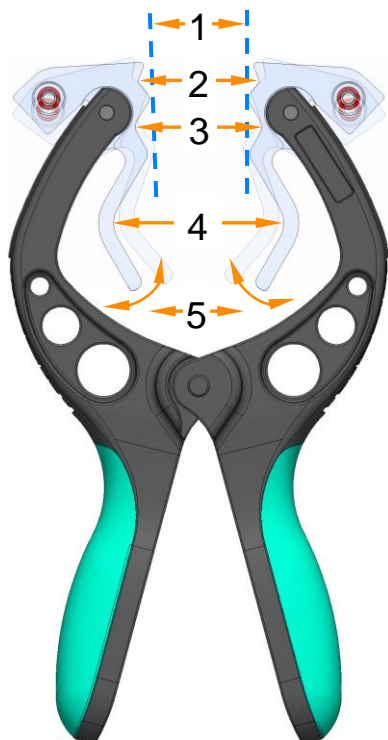

6mm – 32mm

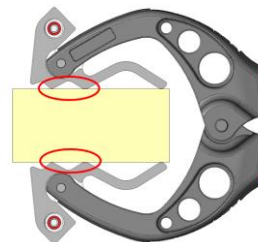

Clamping area 2



8mm – 11mm
M8 – M10



Clamping area 3




11mm – 32mm
M12



Clamping area 4



32mm – 60mm (65)

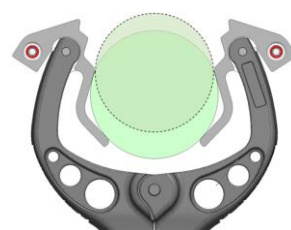

Clamping area 5



high force
27mm – 32mm



Material:	Aluminium extrusion EN AW 6060 T66 (AlMgSi05)
spec. Resistance:	0,032-0,036 Ω *mm ² /m - ~ 34mΩ
surface:	untreated, trowalized

