

Kelvin Clamp



Xeron GmbH
Industriezone 6
A-6832 Röthis

Web: www.xeron.at
L-Page: <https://kelvinclamp.xeron.at>
E-Mail: office@xeron.at



Regional Court Feldkirch
FN 637514 x
ATU81315827



xe-kk-4s-4s-rt



xe-kk-4s-4s-sw



xe-kk-4s-4s-bl

Technical specifications:

1x Socket: **4mm (Multi Contact)**

Current contin.: 32 A

Rated voltage: 1000 V

Clamp:

Contact pressure: 45N – 120N



xe-kk-4u-4u-rt



xe-kk-4u-4u-sw



xe-kk-4u-4u-bl

Technical specifications:

2x Socket: **4mm (Multi Contact)**

Current contin.: 32 A

Rated voltage: 1000 V

Clamp:

Contact pressure: 45N – 120N



Technical specifications:

1x Socket: **4mm (Multi Contact)**

Current contin.: 32 A

Rated voltage: 1000 V

1x Socket: **6mm (Multi Contact)**

Current contin.: 100 A (cable 16mm²)

Rated voltage: 600V

Clamp

Contact pressure: 45N – 120N

Stäubli

XE-KST6VR-16-SW (cabel 16mm²)
article number: 23.001-21 (black)

XE-KST6VR-16-RT (cabel 16mm²)
article number: 23.001-22 (red)

**(Xeron 6mm Round connector:
Available Q4/2026)**



xe-kk-4u-6u-rt



xe-kk-4u-6u-sw


xe-kk-dm-i-6mm2-ka7,5

Technical specifications:



Cable direct installation

Clamp


Contact pressure: 45N – 120N

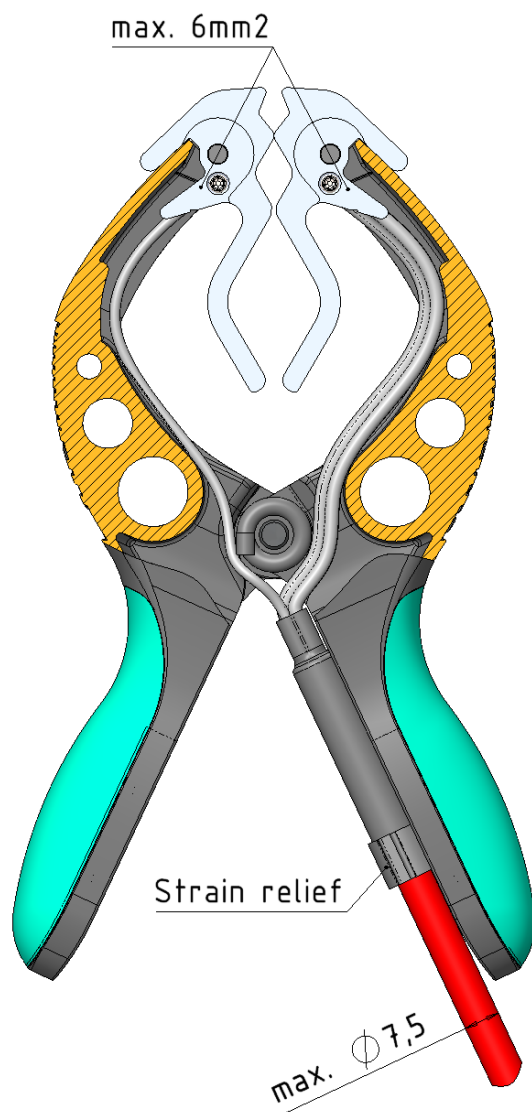

Clamping area 1

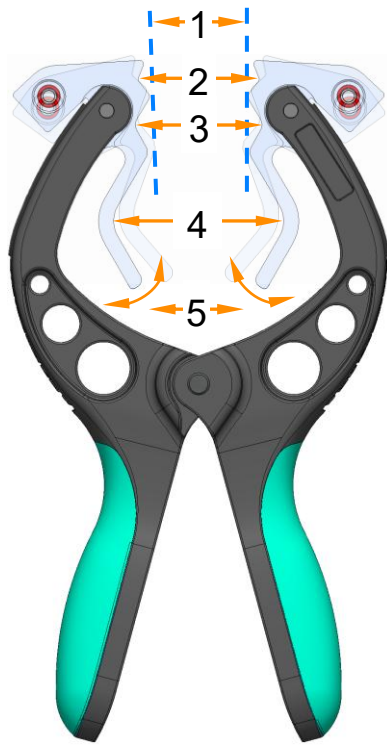

6mm – 32mm




Clamping area 2



8mm – 11mm
M8 – M10




Clamping area 3




11mm – 32mm
M12



Clamping area 4



32mm – 60mm (65)



Clamping area 5



high force
27mm – 32mm



Material:	Aluminium extrusion EN AW 6060 T66 (AlMgSi05)
spec. Resistance:	0,032-0,036 $\Omega \cdot \text{mm}^2/\text{m}$ - ~ 34mΩ
surface:	untreated, trowalized

